

sinopé

TH1300RF

WEB PROGRAMMABLE FLOOR HEATING THERMOSTAT



neviweb

RAISING COMFORT TO THE
NEXT LEVEL

Our Web programmable floor heating thermostat enhances consumer's experience with the remote access to their heating system. Results? A perfect temperature at the perfect time, and additional savings made simple.

Get a floor heating control system at a fraction of the price: for a floor heating installation requiring more than 15 A, connect up to 10 expansion units (TR1310) per thermostat. A low-cost solution that will satisfy your needs.

Ideal for: house, cottage, multi-housing property managers and commercial buildings

Web programmable



TH1300RF

TR1310



Heating cable



Heating cable mat

TH1300RF WEB PROGRAMMABLE FLOOR HEATING THERMOSTAT

ADDED VALUE



- Remote access through the neviweb® platform
- 7-day programming, up to 6 periods per day
- Modes: automatic, manual, away, standby, frost safe
- Energy consumption reports generated on-demand
- E-mail alerts sent according to set parameters
- Early start function
- Equipped with a built-in ground fault circuit interrupter (Class A GFCI)
- Second output allowing the control of an auxiliary heating system
- 3-year warranty

See comparative chart for complete list of functionalities.

OPERATION

- The Web programmable floor heating thermostat allows to control the floor or ambient temperature manually and remotely.
- Extended range communication: no repeater required.

Remote access requires a permanent Internet connection and a GTI25 Web interface



SPECIFICATIONS

Operating voltage: 120 / 208 / 240 Vac, 50 / 60 Hz

Maximum load:

1800 W @ 120 Vac / 15 A

3120 W @ 208 Vac / 15 A

3600 W @ 240 Vac / 15 A

Setpoint range: 5 °C to 30 °C [41 °F to 86 °F]

Display range: 0 °C to 70 °C [32 °F to 99 °F]


Resolution: ±0.5 °C [±1 °F]

Storage: -20 °C to 50 °C [-4 °F to 122 °F]


Auxiliary output: 24 Vac / Vdc / 0.1 A

Compatibility: 10K / 12K sensors at 25 °C

Floor sensor included.

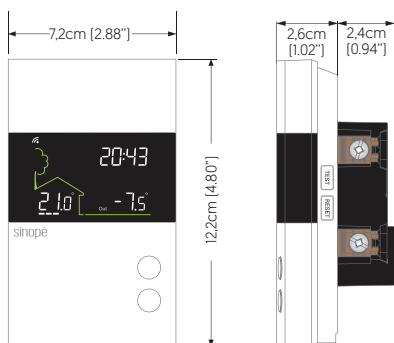

TH1300RF

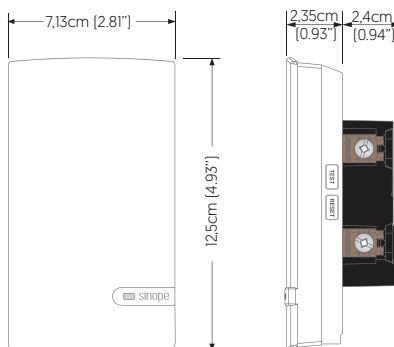

TR1310

Neviweb® is a registered trademark of Sinopé Technologies Inc. in Canada and the United States.



sinopé

T. : 450.741.7700 TF: 1.855.741.7701

sinopetech.com

ventes.sales@sinopetech.com

Saint-Jean-sur-Richelieu, Qc, Canada

TR1310 expansion unit and AC1310-01 sensor

- For a large floor heating installation that requires a system exceeding 15 A, you may install expansion units (TR1310) specially designed for this type of application and it will prevent using several thermostats. Each expansion unit controls its floor section according to the directions received from the thermostat. Maximum of 10 expansion units per thermostat.
- When installing your floor heating system, think about adding a second floor heating sensor. If the first sensor is damaged or ceases to work, you will be able to connect and use the additional sensor as a replacement sensor.

2700735-0003-C