

sinopé



Smart Double-Pole Thermostat TH1500ZB-C4



Electric baseboard



Fan-forced convector



Convector



Radiant ceiling heating

CONNECTS WITH
Control4
CERTIFIED

■ FEATURES*

- Backlit display
- Detects the connected load
- Lockable buttons
- Personalization of the minimum and maximum temperatures available for thermostat control
- Indoor and outdoor or setpoint temperatures displayed on the thermostat screen
- Temperature displayed in °C or °F
- Ability to cut the power of the heater when its use is no longer required, thanks to its 4 wires

* Some features must be programmed by a Control4 integrator.

- Remote control with your smartphone, tablet or computer*
- Schedule programming
- Voice control with Amazon Alexa and Google Assistant

*Remote access requires a permanent Internet connection and a Control4 controller.

■ COMMUNICATION

Protocol: Zigbee 3.0
Frequency: 2.4 GHz
Transmission power: +20 dBm
Receiver sensitivity: -108 dBm
Encryption key: AES-128

■ TECHNICAL SPECIFICATIONS

Operating voltage: 120/208/240/277 Vac, 50/60 Hz

Relay switching

Maximum load:

1800 W @ 120 Vac / 15 A

3120 W @ 208 Vac / 15 A

3600 W @ 240 Vac / 15 A

4155 W @ 277 Vac / 15 A

Setpoint range: 5 °C to 36 °C [41 °F to 97 °F]

Display range: 0 °C to 50 °C [32 °F to 99 °F]

Storage: -20 °C to 50 °C [-4 °F to 122 °F]

Resolution: ± 0.5 °C [± 1 °F]


3-year warranty

■ CERTIFICATION



■ STANDARDS

Conforms to CSA-C828-19

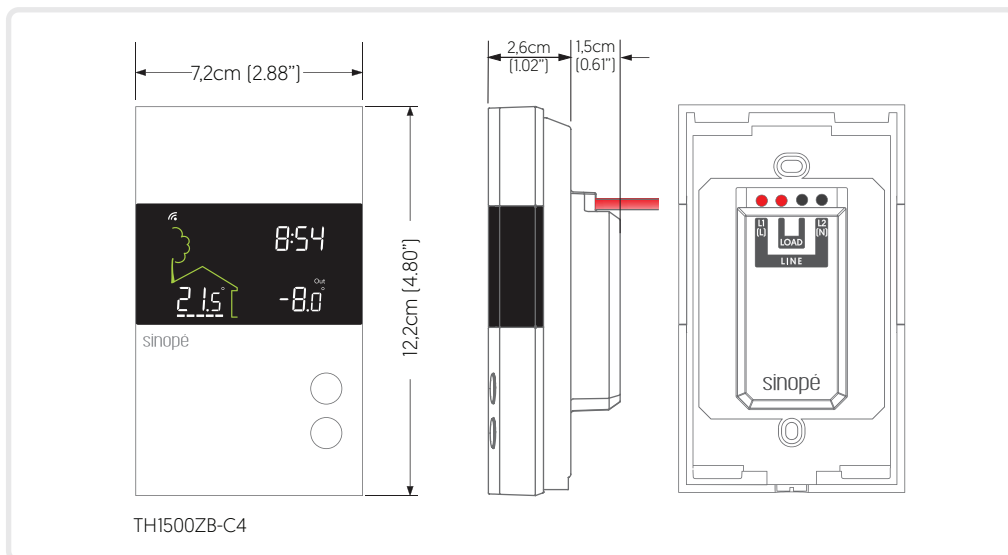

sinopé

T: 450.741.7700
TF: 1.855.741.7701

sinopetech.com - sales@sinopetech.com
Saint-Jean-sur-Richelieu, Qc, Canada