

# Smart Line Voltage Thermostat TH1134ZB/HC



\*A neutral wire is required for the thermostat installation.







## ■ FFATURES\*

- TFT color display
- Customizable thermostat display [weather condition, time, indoor and outdoor temperature, etc.]
- Temperature displayed in Celsius or Fahrenheit
- Customization of the minimum and maximum temperatures available

These features are available in Neviweb and require the GT130 hub. Features may vary from a platform to another.

## COMMUNICATION

Protocol: Zigbee 3.0 Frequency: 2.4 GHz

Transmission power: +20 dBm Receiver sensitivity: -108 dBm Encryption key: AES-128





STANDARDS

Complies with CSA-C828-19



- Automations: create automations that run based on time, sunrise/sunset, device action, or your presence
- **Scenes:** activate personalized ambiances according to the time of the day, events or activity
- Energy reports: see your consumption and savings in real-time
- Geofencing: trigger actions based on your presence
- Voice assistants: works with Amazon Alexa and Google Assistant
- Éco Sinopé: integrates with the Éco Sinopé functionnality allowing you to reduce your energy consumption during peak periods and save on your electricity bill

These features are available in Neviweb and require the GT130 hub. Features may vary from a platform to another.

# ■ TECHNICAL SPECIFICATIONS

Operating voltage: 120/208/240 Vac, 60 Hz

Single-pole switching (triac)

3-wire thermostat compatible with 4-wire installation

### Maximum load:

16.7 A / 2000W @ 120 Vac 16.7 A / 4000W @ 240 Vac


### Minimum load:

1.25 A / 150W @ 120 Vac 1.25 A / 300W @ 240 Vac Resistive load only

Display range: 32 °F to 99 ° [0 °C to 50 °C] Storage: -4 °F to 122 °F [-20 °C to 50 °C] Operation: 32 °F to 122 °F [0 °C to 50 °C]

Resolution: ±1°F (± 0.5°C)

3-year warranty

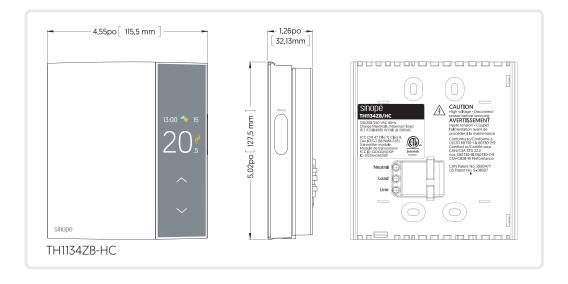

sinopé

T: 450.741.7700 TF: 1.855.741.7701 sinopetech.com - sales@sinopetech.com Saint-Jean-sur-Richelieu, Qc, Canada