


Ductless heat pump interface HP6000ZB-GE









FFATURES

- · Allows to control the heat pump via Neviweb
- Possibility to ignore the remote control of the heat pump to control it only with Neviweb
- Allows the interlocking of air conditioning and heating with the Sinopé thermostats
- *These features are available in Neviweb and require the use of the GT130 gateway. The features may vary from one platform to another.


COMMUNICATION

Protocol: Zigbee 3.0 Frequency: 2.4 GHz

Transmission power: +20 dBm Receiver sensitivity: -108 dBm **Encryption key:** AES-128

STANDARDS

Complies with FCC15 /NMB-003

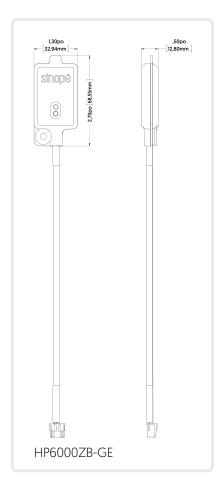



- Control modes*: Cool, Heat, Dry, Fan and OFF
- Adjustment of the orientation of the heat pump louvers
- Adjustment of the fan intensity
- · Activation or deactivation of the display on the heat pump head
- Create automations that run based on time, sunrise/sunset, device action, or your presence
- Automate the interlocking of air conditioning and heating
- Activate personalized ambiances according to the time of the day, events or activity thanks to the scenes
- Setpoint control
- Voice assistants: compatible with Amazon Alexa and Google Assistant

These features are available in Neviweb and require the use of the GT130 gateway. The features may vary from one platform to another.

Feature available on models that allow this function

COMPATIBLE HEAT PUMPS

Scan the QR code to see which heat pumps and air conditioners are compatible with the HP6000ZB-GE.



TECHNICAL SPECIFICATIONS

Power supply: via heat pump / air conditioner communication port

Operating temperature: 32 °F to 104 °F (0 °C to 40 °C)

Storage: -4 °F to 122 °F (-20 °C to 50 °C)

3-year warranty

T: 450.741.7700 **TF:** 1.855.741.7701

sinopetech.com - sales@sinopetech.com Saint-Jean-sur-Richelieu, Qc, Canada