

sinopé



## Ductless heat pump interface HP6000ZB-HS



TH1134ZB/HC\*



Ductless heat pumps and air conditioners Hisense equipped with a compatible communication port

\*Possibility to combine the HP6000ZB-HS with the TH1134ZB/HC thermostat for a better use of the electric baseboard heater and the heat pump in the same room [air conditioning and heating interlocking].



## ■ FEATURES

- Allows to control the heat pump via the platforms (Neviweb and Sinopé Smart Systems)
- Possibility to ignore the remote control of the heat pump to control it only with Sinopé Smart Systems and/or Neviweb and/or with the Sinopé TH1134ZB/HC thermostat
- Associated with the TH1134ZB/HC thermostat, the HP6000ZB-HS allows the interlocking of the air conditioning and the electric heating in the same room

\*These features are available in Neviweb and Sinopé Smart Systems and require the use of the GT130 gateway. The features may vary from one platform to another.

## ■ COMMUNICATION

Protocol: Zigbee 3.0

Frequency: 2.4 GHz


Transmission power: +20 dBm

Receiver sensitivity: -108 dBm

Encryption key: AES-128

## ■ STANDARDS

Complies with FCC15 /NMB-003

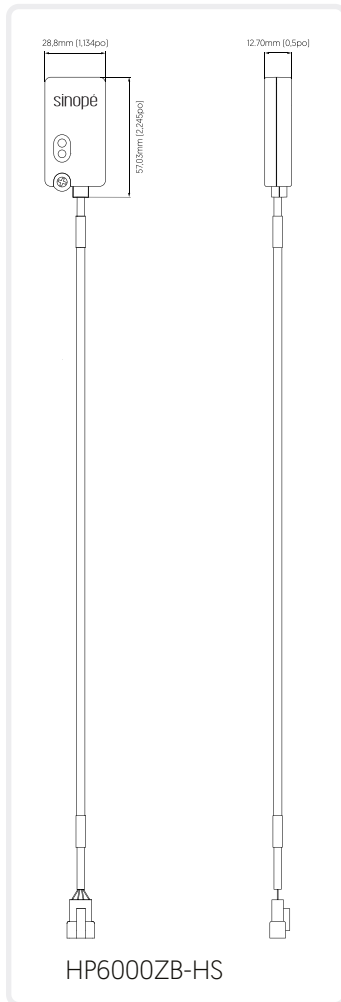

- **Control modes:** Cool, Heat, Dry, Fan and OFF
- Adjustment of the orientation of the heat pump louvers
- Adjustment of the fan intensity
- Activation or deactivation of the display on the heat pump head
- Create automations that run based on time, sunrise/sunset, device action, or your presence
- Automate the interlocking of air conditioning and heating in all rooms of the house thanks to an automation between devices with the Sinopé thermostats of the different rooms.
- Activate personalized ambiances according to the time of the day, events or activity thanks to the scenes
- Setpoint control
- Advanced features in Sinopé Smart Systems [e.g. prioritization of heating by the heat pump when it is more efficient than the baseboards]\*\*

These features are available in Neviweb and Sinopé Smart Systems and require the use of the GT130 gateway. The features may vary from one platform to another.

\* Feature available on models that allow this function

\*\*Requires the TH1134ZB/HC heating and cooling line thermostat

## ■ COMPATIBLES HEAT PUMPS

Scan the QR code to see which heat pumps and air conditioners are compatible with the HP6000ZB-HS.



## ■ TECHNICAL SPECIFICATIONS

**Power supply:** via heat pump / air conditioner communication port

**Operating temperature:** 32 °F to 104 °F [0 °C to 40 °C]

**Storage:** -4 °F to 122 °F [-20 °C to 50 °C]

3-year warranty



sinopé

T: 450.741.7700  
TF: 1.855.741.7701

sinopetech.com - sales@sinopetech.com  
Saint-Jean-sur-Richelieu, Qc, Canada