
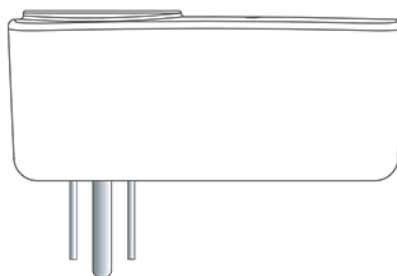
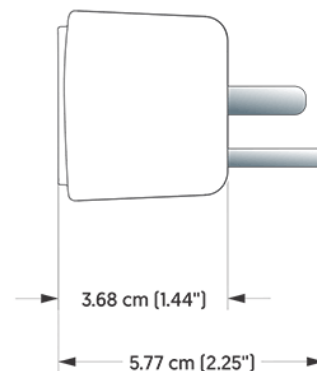


Smart plug

Zigbee 3.0

SP2600ZB

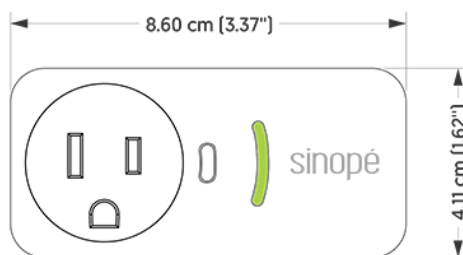

Compliant with UL 60730-1
Certified under CSA E60730-1

Technical specifications

Type	Smart electrical plug
Color	White
Communication	- Protocole: Zigbee HA 1.2 - Frequency: 2.4 GHz - Transmission power: +8 dBm
Transmitter module	- IC: 3653A-EM3585 - FCC ID: NHS-EM3585
Power supply	AC 120 Vac, 60 Hz

Maximum load	• 120 V / 15 A
Temperature ranges	• Operating: 0 °C to 40 °C (32 °F to 104 °F) • Storage: -20 °C to 50 °C (-4 °F to 122 °F)
Installation	• Plugs directly into a wall outlet
Control	• On/Off button on the outlet allows you to manually turn the connected device on or off
Compatible devices	• 960 W: Incandescent • 1800 W: Resistive • 500 VA: Electronic ballast • 0.5 HP: Motor
Features	• Connected power reading • Enables remote control, monitoring, and programming of any device or lighting connected to the smart electrical outlet • Programming through automation*
Warranty	• 3 years

* These features are available in the Sinopé app and Sinopé Smart Systems platform and require the use of the GT130 gateway (not included).

Model

No. product	Description	Volts	Hz	Qty
SP2600ZB	Smart plug - Zigbee	120	60	

Specifications are subject to change without notice

The signature certifies that the installation complies with the above installation diagrams.			
	Designation	Profession	Signature
Project's name:			
Address:			
Promotor:			
Builder:			
Consulting engineer:			
Contractor #1:			
Contractor #2:			
Contractor #3:			
Date:			