



Smart Water Heater Controller RM3510WF







FFATURES*

- · Detection of the connected load
- Temperature sensor [AC3500-01]** ensuring maximum comfort and protection
- Ability to connect a water detection cable [AC4200C-02]*** to the electric water heater controller to detect potential leaks and send an alert
- Compact design for easy installation
- Enables remote control of electric water heaters up to 20.8 A @ 240 V
- *Features available in the Sinopé app. Features may vary from one platform to another.
- **AC3500-01 temperature sensor included.
- ***AC4200C-02 water detection cable sold separately.

COMMUNICATION

Protocol: Wi-Fi

Standard: IEEE 802.11 b/g/n/ax

Frequency: 2.4 GHz **Encryption:** WPA2


CERTIFICATION




STANDARDS

Complies with ANSI/UL Std. 916 Certified under CAN/CSA Std. C22.2 No205 FCC CFR 47 Title 15 Class B CAN ICES-3(B)/NMB-3(B)

ACCESSORIES

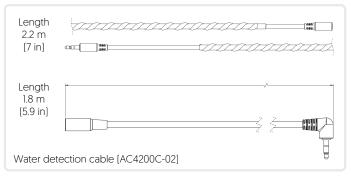



- T: 450.741.7700 sinopé TF: 1.855.741.7701
- sinopetech.com sales@sinopetech.com Saint-Jean-sur-Richelieu, Qc, Canada



- Schedules: Program different schedules for each day of the week, up to 12 periods per day
- Scenes: Activate custom scenes based on time of day, activity, or event
- Energy reports: View real-time consumption and savings
- Geofencing: Trigger actions based on your presence
- Voice assistants: Compatible with Amazon Alexa and Google Assistant
- Éco Sinopé: integrates with the Éco Sinopé feature allowing you to reduce your energy consumption during peak events and save on your electricity bill

■ TECHNICAL SPECIFICATIONS

Power supply: 120/208/240 VAC, 60 Hz

Maximum resistive load: 20.8 A Maximum wire gauge: 10 AWG

Operating temperature: 0 °C to 40 °C (32 °F to 104 °F)

Storage: -20 °C to 50 °C [-4 °F to 122 °F]

Warranty: 3 years

Also available: Zigbee version (RM3500ZB)

