

sinopé



## Ductless heat pump interface HP6000WF-TCL



Ductless heat pumps and air  
conditioners equipped with a  
compatible communication port



## ■ FEATURES

- Allows to control the heat pump via the Sinopé Neviweb app
- Possibility to ignore the remote control of the heat pump to control it only with the Sinopé Neviweb app
- Allows interlocking of air conditioning and electric heating with compatible Sinopé thermostats

## ■ COMMUNICATION

Protocol: Wi-Fi

Frequency: 2.4 GHz

Transmission power: +20 dBm

Receiver sensitivity: -108 dBm

Encryption key: WPA2


## ■ STANDARDS

Complies with ANSI/UL 916 standard

Certified under CAN/CSA C22.2 No. 205.

FCC CFR 47 Title 15 Class B

CAN ICES-3(B)/NMB-3(B)

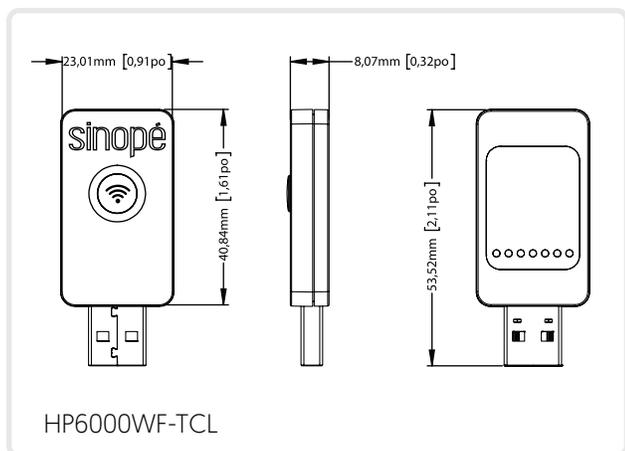

sinopé

- Control modes\*: Cool, Heat, Dry, Fan and OFF
- Adjustment of the orientation of the heat pump louvers
- Adjustment of the fan intensity
- Activation or deactivation of the display on the heat pump head
- Create schedules that fit your daily routine
- Activate the interlocking of air conditioning and heating
- Activate personalized ambiances according to the time of the day, events or activity thanks to the scenes
- Setpoint control
- Voice assistants: Works with Amazon Alexa and Google Assistant

These features are available in the Sinopé Neviweb app. The features may vary from one platform to another.

\* Feature available on models that allow this function

## ■ COMPATIBLE HEAT PUMPS



Scan the QR code to see which heat pumps and air conditioners are compatible with the HP6000WF-TCL.

## ■ TECHNICAL SPECIFICATIONS

Power supply: via heat pump / air conditioner communication port

Operating temperature: 32 °F to 104 °F [0 °C to 40 °C]

Storage: -4 °F to 122 °F [-20 °C to 50 °C]

3-year warranty

sinopé

T: 450.741.7700  
TF: 1.855.741.7701

sinopetech.com - sales@sinopetech.com  
Saint-Jean-sur-Richelieu, Qc, Canada