



Flow Sensor FS4220

Can interact with the following devices :



Sedna Wi-Fi smart water valve
(VA4220WF/VA4221WF)



Sedna Zigbee smart water valve Zigbee
(VA4220ZB/VA4221ZB)

■ FEATURES

- Detects invisible leaks that can occur when pipes break in walls and ceilings
- Detects abnormal flow rates of 2L/min [$\frac{3}{4}$ inch version] and 4L/min [1 inch version]
- Robust and durable sensor with high quality stainless steel

■ STANDARDS

Compliant to AINSI B120.1
Compliant to NSF/ANSI 61



Also available :
Flow sensor 1 in
FS4221



- Choose to have the main water valve shut off or be alerted when a water leak is detected or an abnormal flow* is sensed**.
- Ability to view your real-time water consumption through consumption charts available in Neviweb.

* If no action is taken after receiving such an alert, the valve will close to prevent potential damage.

** Tolerance for abnormal flow before alert or valve closure is at least 15 minutes.

■ TECHNICAL SPECIFICATIONS

Compatibility: compatible with the 2nd generation Sedna valve

Water temperature: $\leq 60^{\circ}\text{C}$ [140°F]

Material: Stainless steel 304, lead-free

Hydraulic withstand pressure: 1.75 MPa [244 PSI]

FS4220

Diameter and connection: $\frac{3}{4}$ in NPT

Flow range: 2-45 L/Min


FS4221

Diameter and connection: 1 in NPT

Flow range: 4-45 L/Min

3-year warranty

* Indoor installation only

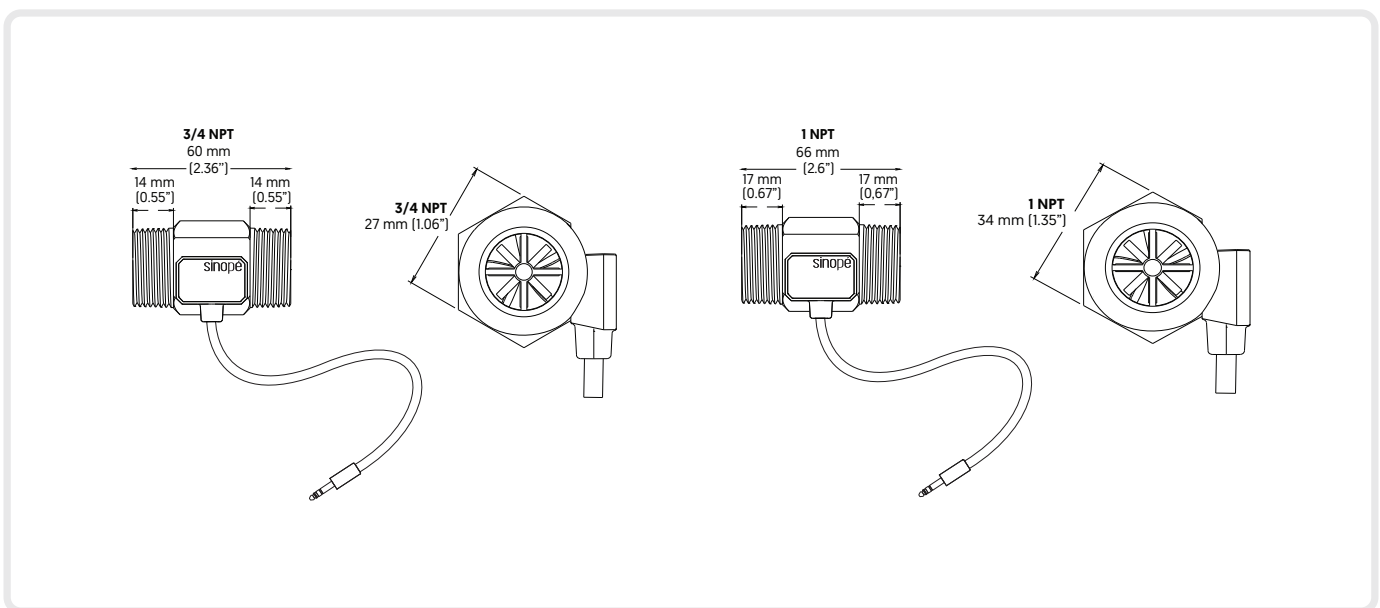

sinopé

T. : 450.741.7700
TF. : 1.855.741.7701

sinopetech.com - sales@sinopetech.com
Saint-Jean-sur-Richelieu, Qc, Canada