



TH1133CR

sinopé | Pro[®]

Evolutionary thermostat for baseboard heaters

evo[®]

The Evo thermostat is an evolutionary thermostat whose Wi-Fi connectivity can be activated at any time, giving users access to a full range of smart features. It's an eco-friendly alternative that allows customers to upgrade their thermostat to a Wi-Fi-enabled smart thermostat without replacing it. Combining energy savings, comfort and ease of use, the Evo thermostat also distinguishes itself by its sleek, modern design.

**Standard thermostat ready for
Wi-Fi connection**

Installer benefits



Fast installation



Evolutionary technology at the price of a standard thermostat



No on-site Wi-Fi setup required

User benefits

Wi-Fi ready: Smart features can be activated anytime.



Precise and durable Triac control



Smart features with the Sinopé Neviweb app
(schedules, programming, etc.)




Up to 25% savings on heating costs*

*When connected to the Sinopé ecosystem and used with compatible smart features. Actual savings may vary depending on usage.

Compatibilities

- Baseboard heaters
- Convector
- Fan-forced convector
- Radiant ceiling



Communication

- Protocol: Wi-Fi
- Standard: IEEE 802.11 b/g/n
- Frequency: 2.4 GHz
- Encryption key: WPA2

Technical specifications

- Power supply : 120 / 208 / 240 Vac, 60 Hz
- Maximum load TH1133CR:
12.5 A / 3000 W @ 240 Vac
12.5 A / 1500 W @ 120 Vac
- Maximum load TH1134CR:
16.7 A / 4000 W @ 240 Vac
16.7 A / 2000 W @ 120 Vac
- Minimum load:
Baseboard, convector and radiant ceiling
 - 1.25 A / 300 W @ 240 Vac
 - 2 A / 250 W @ 120 Vac
- Fan-forced convector
 - 2 A / 500 W @ 240 Vac
 - 4 A / 500 W @ 120 Vac
- Triac switching technology
- Temperature ranges
Setpoint: 5 °C to 30 °C [41 °F to 86 °F]
Display: 0 °C to 50 °C [32 °F to 99 °F]
Storage: -20 °C to 50 °C [-4 °F to 122 °F]
Operation: 0 °C to 50 °C [32 °F to 122 °F]
- Resolution: 1 °C [1 °F]

Standards


- Tested in accordance with CSA-C828-19




In the box

- Evo thermostat
- 2 mounting screws
- 3 wire connectors
- Welcome guide

Product dimensions

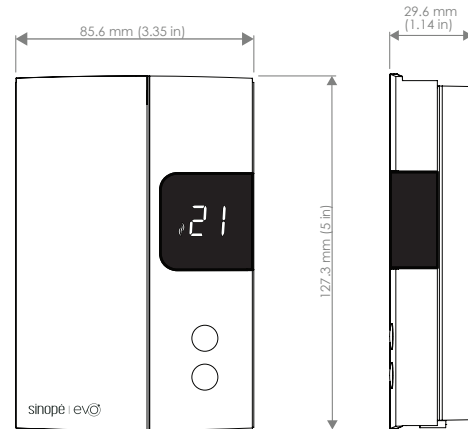

TH1133CR

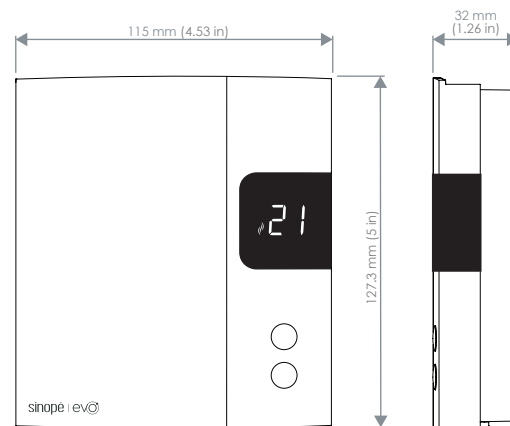

TH1134CR



Also available:
4000W version
TH1134CR

