

Smart In-Wall Outlet

SP2610ZB



Incandescent: 960 W



Electronic ballast: 500 VA



Resistive: 1800 W




Motor: 0.5 HP



■ FEATURES*

- Detects the connected load
- Allows remote control, monitoring, and programming of any appliance or lighting connected to the smart in-wall outlet
- Integrates directly with the Echo Show and Amazon Echo Plus

* These features are available in Neviweb and Neviweb Premium and require the GT130 hub. Features may vary from a platform to another.

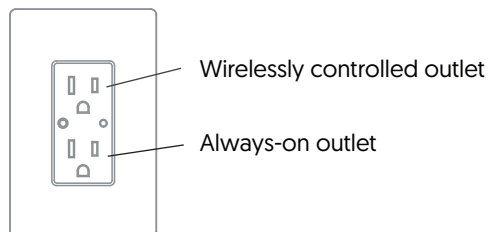

■ COMMUNICATION

Protocol: Zigbee HA 1.2

Frequency: 2.4 GHz

Transmission power: +8 dBm

Encryption key: AES-128

■ CERTIFICATIONS

Conforms to UL 60730-1 / CSA E60730-I



- **Automations:** create automations that run based on time, sunrise/sunset, device action, or your presence
- **Scenes:** activate personalized ambiances according to the time of the day, events or activity
- **Energy reports:** see your consumption and savings in real-time
- **Geofencing:** trigger actions based on your presence
- **Voice assistants:** works with Amazon Alexa and Google Assistant

* Discover more features: sinopetech.com

■ SPECIFICATIONS

Operating voltage: 120 Vac, 60 Hz

Maximum load:

960 W: Incandescent

1800 W: Resistive

500 VA: Electronic ballast

½ HP: Motor

Operating temperature: 0 °C to 40 °C [32 °F to 104 °F]


Storage: 20 °C to 50 °C [-4 °F to 122 °F]

*Only the identified outlet can be controlled remotely.

Wall plate included

3-year warranty

Indoor installation only.

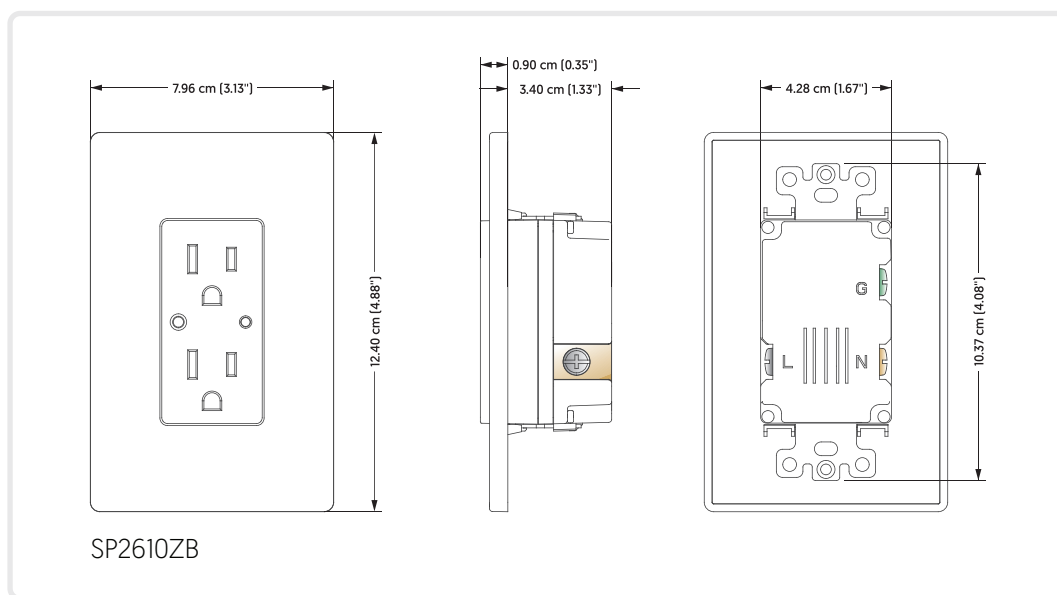

sinopé

T: 450.741.7700
TF: 1.855.741.7701

sinopetech.com - sales@sinopetech.com
Saint-Jean-sur-Richelieu, Qc, Canada