

Smart thermostat LITE for baseboard heaters TH1133WF















■ FFATURES*

- Backlit display
- Lockable buttons
- Personalization of the minimum and maximum temperatures available for thermostat control
- Ambient temperature display
- Temperature display in °C or °F
- * These features are available in the Neviweb app. Features may vary from a platform to another.

COMMUNICATION

Protocol: Wi-Fi

Standard: IEEE 802.11 b/g/n Frequency: 2.4 GHz Encryption key: WPA2





STANDARDS

CSA-C828-19 PERFORMANCE



Also available:

Smart thermostat LITE for baseboard heaters [4000 W]

TH1134WF



- **Schedules:** set a different schedule for each day of the week, up to 12 periods per day
- Scenes: activate personalized ambiances according to the time of the day, events or activity
- Energy reports: see your consumption and savings in real-time*
- Geofencing: trigger actions based on your presence
- Voice assistants: works with Amazon Alexa and Google Assistant
- Éco Sinopé: integrates with the Éco Sinopé feature allowing you to reduce your energy consumption during peak events and save on your electricity bill
- * The load connected to the device must be entered manually in Neviweb in order to view the consumption history.

TECHNICAL SPECIFICATIONS

Operating voltage: 120/208/240 Vac, 60 Hz

Bilateral triode switch (triac)

Maximum load TH1133WF: 12.5 A / 3000 W @ 240 Vac 12.5 A / 1500 W @ 120 Vac Maximum load TH1134WF: 16.7 A / 4000 W @ 240 Vac 16.7 A / 2000 W @ 120 Vac

Minimum load:

1.25 A / 300 W @ 240 Vac

Resistive load only.


Setpoint range: $5 \, ^{\circ}\text{C}$ to $30 \, ^{\circ}\text{C}$ [41 °F to $86 \, ^{\circ}\text{F}$] Display range: $0 \, ^{\circ}\text{C}$ to $50 \, ^{\circ}\text{C}$ [32 °F to $99 \, ^{\circ}\text{F}$] Storage: $-20 \, ^{\circ}\text{C}$ to $50 \, ^{\circ}\text{C}$ [$-4 \, ^{\circ}\text{F}$ to $122 \, ^{\circ}\text{F}$] Operation: $0 \, ^{\circ}\text{C}$ to $50 \, ^{\circ}\text{C}$ [32 °F to $122 \, ^{\circ}\text{F}$]

Resolution: ± 1 °C (± 1 °F)

Installation: Requires at least two cables in the electrical box, each

containing at least two wires.

3-year warranty

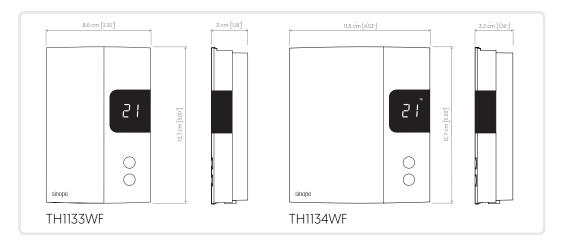

sinopé

T: 450.741.7700 **TF**: 1.855.741.7701

sinopetech.com - sales@sinopetech.com Saint-Jean-sur-Richelieu, Qc, Canada