



Smart thermostat LITE for baseboard heaters TH1133WF



Baseboard heaters



Fan-forced convector (long cycle)
3-wire connection required



Convector (short cycle)



Radiant ceiling

sinopé

Works with
Apple Home

COMPATIBLE WITH
Amazon Alexa

works with
Google Home

■ FEATURES*

- Backlit display
- Lockable buttons
- Personalization of the minimum and maximum temperatures available for thermostat control
- Ambient temperature display
- Temperature display in °C or °F

* These features are available in the Neviweb app. Features may vary from a platform to another.

■ COMMUNICATION

Protocol: Wi-Fi

Standard: IEEE 802.11 b/g/n

Frequency: 2.4 GHz

Encryption key: WPA2

■ CERTIFICATION



■ STANDARDS

CSA-C828-19 PERFORMANCE



Also available:

Smart thermostat LITE
for baseboard heaters
[4000 W]

TH1134WF

Note: The TH1134WF (4000 W) model is not compatible with Apple Home.

sinopé

- **Schedules:** set a different schedule for each day of the week, up to 12 periods per day
- **Scenes:** activate personalized ambiances according to the time of the day, events or activity
- **Energy reports:** see your consumption and savings in real-time*
- **Geofencing:** trigger actions based on your presence
- **Voice assistants:** works with Amazon Alexa and Google Assistant
- **Éco Sinopé :** integrates with the Éco Sinopé feature allowing you to reduce your energy consumption during peak events and save on your electricity bill

* The load connected to the device must be entered manually in Neviweb in order to view the consumption history.

■ TECHNICAL SPECIFICATIONS

Operating voltage: 120/208/240 Vac, 60 Hz

Bilateral triode switch (triac)

Maximum load TH1133WF:

12.5 A / 3000 W @ 240 Vac

12.5 A / 1500 W @ 120 Vac

Maximum load TH1134WF:

16.7 A / 4000 W @ 240 Vac

16.7 A / 2000 W @ 120 Vac

Minimum load:

Baseboard, convactor and
radiant ceiling

1.25 A / 300 W @ 240 Vac

2 A / 250 W @ 120 Vac

Resistive load only.

Fan-forced heater

2 A / 500 W @ 240 Vac

4 A / 500 W @ 120 Vac

Setpoint range: 5 °C to 30 °C [41 °F to 86 °F]

Display range: 0 °C to 50 °C [32 °F to 99 °F]


Storage: -20 °C to 50 °C [-4 °F to 122 °F]

Operation: 0 °C to 50 °C [32 °F to 122 °F]

Resolution: 1 °C [1 °F]

Installation: Requires at least two cables in the electrical box, each containing at least two wires.

3-year warranty

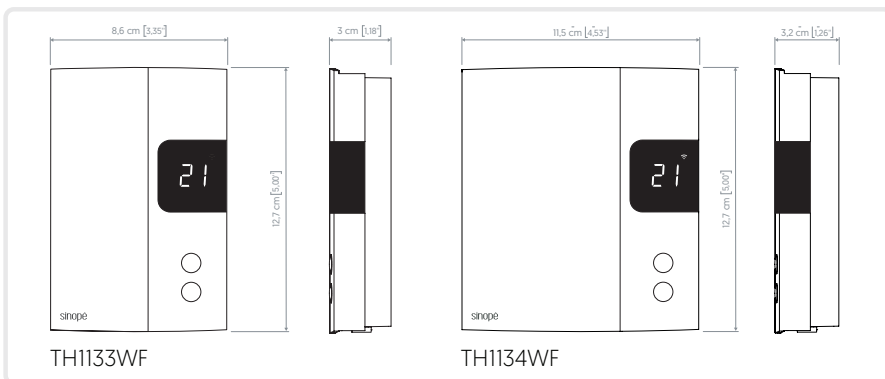

sinopé

T: 450.741.7700
TF: 1.855.741.7701

sinopetech.com - sales@sinopetech.com
Saint-Jean-sur-Richelieu, Qc, Canada

Neviweb is a trademark of Sinopé Technologies Inc., registered in Canada and the U.S.
Amazon, Alexa and all related logos are trademarks of Amazon.com, Inc. or its affiliates.

Google is a trademark of Google LLC.

Apple, Apple Watch, HomeKit, iPad, iPad Air, and iPhone are trademarks of Apple Inc., registered in the U.S. and other countries. HomePod is a trademark of Apple Inc.

The Wi-Fi CERTIFIED™ Logo is a certification mark of Wi-Fi Alliance®